

Distributed by:

**JAMECO<sup>®</sup>**  
**ELECTRONICS**

[www.Jameco.com](http://www.Jameco.com) ♦ 1-800-831-4242

The content and copyrights of the attached  
material are the property of its owner.

8

7

6

5

4

3

2

1

H

H

G

G

F

F

E

E

D

D

C

C

B

B



A

A

Contact Form: SPDT  
 Maximum Contact Load: 0.5A  
 Maximum Contact Volt: 24VDC  
 Maximum Contact Volt: 115VAC  
 Typical Contact Resistance: 1 ohm  
 Tilt: single plane w/ +/-10 degrees included angle  
 Sensitivity to shock/vibration/motion: single plane  
 Operating Temperature: -37 degrees C to +85  
 Degrees C  
 Tin plating

**Notes:**

1. Mount with pins up
2. Angle is 20 degrees to 10 degrees with pin up
3. Contact resistance is measured @ 5VDC and 0.01A with switch tilted 45 degrees beyond operating point
4. Switch contacts are open when at rest in any position. Contacts pulse closed when switch is disturbed.

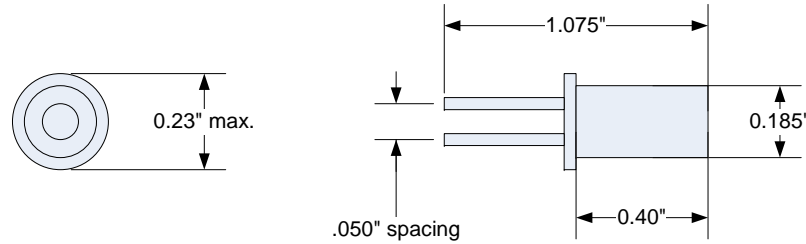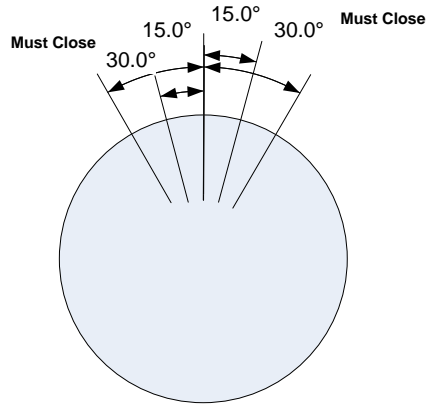

<b>Jameco Part Number 235926</b>	<b>Vibration/Tilt Switch Sensor</b>			
	<b>Series 3004</b>			
	SIZE in	FSCM NO	DWG NO	REV
	SCALE	SHEET		1 OF 1

8

7

6

5

4

3

2

1